

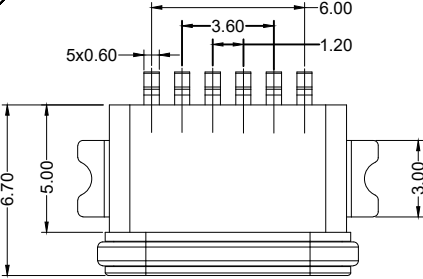
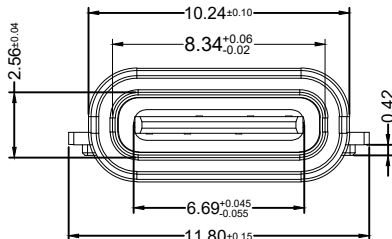
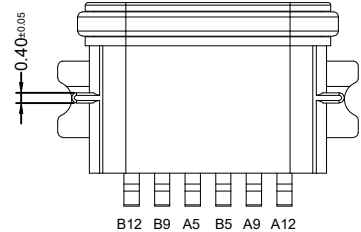

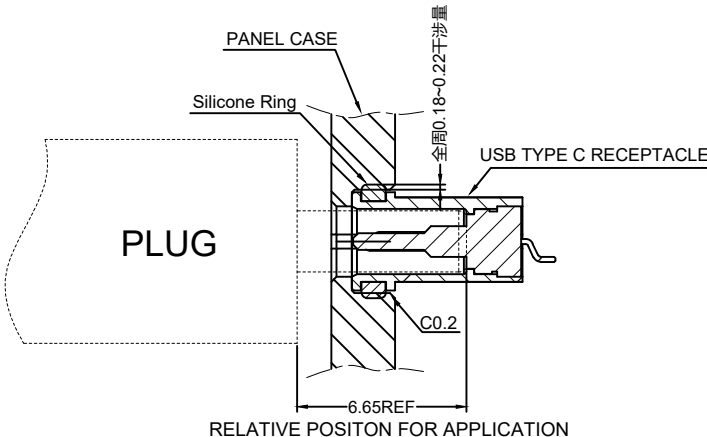
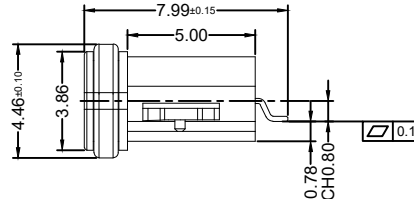
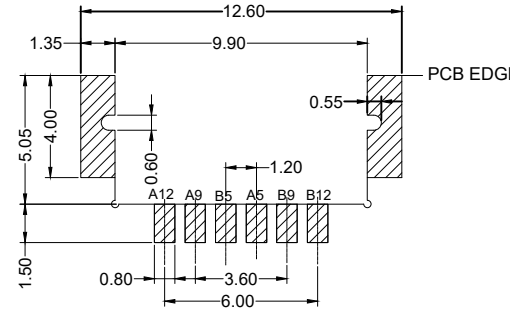
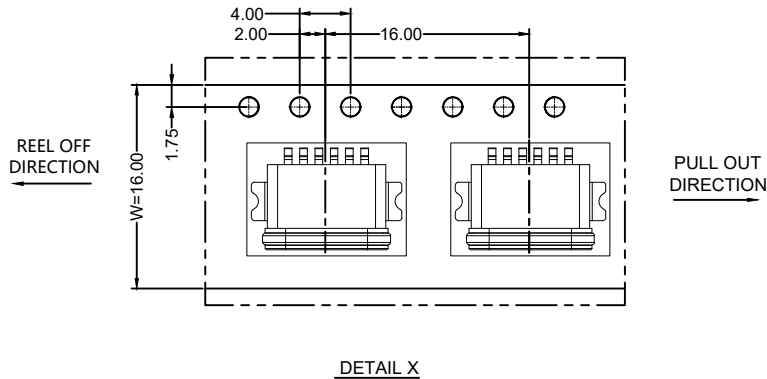
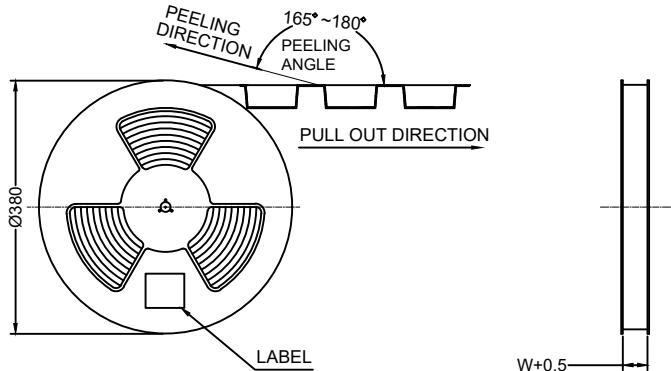



1			2			3			4			5			6																																															
ROHS Compliant REACH   			REV			DESCRIPTION						DATE			APPROVED																																															
			A			新板发行						2023.05.05			HHM																																															
 SPECIFICATION: 1. CURRENT RATING: 3.0 A 2. VOLTAGE RATING: 5.0 V 3. VBUS & GND PINS AND OTHER PINS: 40mΩ /PIN MAX SHIELD: 50mΩ /MAX LLCR MAX. CHANGE OF ALL PINS: 10mΩ 4. INSULATION RESISTANCE: 100MΩ MIN 5. DIELECTRIC WITHSTAND VOLTAGE, AC 100V FOR 1MINUTE 6. INSERTION FORCE: 0.5~2.0kgf 7. UNMATING FORCE: 0.8~2.0kgf 8. DURABILITY: 10000 CYCLES 9. OPERATING TEMPERATURE: -25° C~+85° C 10. THE PEAK TEMPERATURE ON THE BOARO SHALL BE MAINTAINED FOR 10 SECONDS AT 260° C 11. WATERPROOF: IP67.																																																														
 PLUG RELATIVE POSITON FOR APPLICATION									<table><tr><td>A1</td><td>A2</td><td>A3</td><td>A4</td><td>A5</td><td>A6</td><td>A7</td><td>A8</td><td>A9</td><td>A10</td><td>A11</td><td>A12</td></tr><tr><td></td><td></td><td></td><td></td><td>CC1</td><td></td><td></td><td></td><td>VBUS</td><td></td><td></td><td>GND</td></tr><tr><td>B12</td><td>B11</td><td>B10</td><td>B9</td><td>B8</td><td>B7</td><td>B6</td><td>B5</td><td>B4</td><td>B3</td><td>B2</td><td>B1</td></tr><tr><td>GND</td><td></td><td></td><td>VBUS</td><td></td><td></td><td></td><td>CC2</td><td></td><td></td><td></td><td></td></tr></table>						A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12					CC1				VBUS			GND	B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1	GND			VBUS				CC2				
A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12																																																			
				CC1				VBUS			GND																																																			
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1																																																			
GND			VBUS				CC2																																																							
RECOMMENDED PCB LAYOUT TOLERANCE:±0.05			CUSTOMER DRAWING <table><tr><td>UNITS</td><td>SCALE</td><td>SHEET</td></tr><tr><td>mm</td><td>1:1</td><td>1 OF 2</td></tr><tr><td>PROJECTION:</td><td colspan="2">DRAW:</td></tr><tr><td></td><td colspan="2">DAP</td></tr><tr><td>GENERAL TOLERANCE</td><td colspan="2">CHECK:</td></tr><tr><td>.000 ±0.02</td><td colspan="2">HWT</td></tr><tr><td>.00 ±0.10</td><td colspan="2">APPD:</td></tr><tr><td>.0 ±0.20</td><td colspan="2">HHM</td></tr><tr><td>.0 ±2°</td><td colspan="2"></td></tr><tr><td>.00 ±1°</td><td colspan="2"></td></tr></table>			UNITS	SCALE	SHEET	mm	1:1	1 OF 2	PROJECTION:	DRAW:			DAP		GENERAL TOLERANCE	CHECK:		.000 ±0.02	HWT		.00 ±0.10	APPD:		.0 ±0.20	HHM		.0 ±2°			.00 ±1°			铭创科技（东莞）有限公司 Mingchuang Technology (Dongguan) Co., Ltd TITLE 防水TYPE C母座6PIN 沉板0.8 两脚全贴SMT L=6.7 锌合金 IPX7 <table><tr><td>MAT'L</td><td>SEE TABLE</td><td>FINISH</td><td>SEE TABLE</td></tr><tr><td>DWG. NO.</td><td>A04W0610A</td><td>PART NO.</td><td>_____</td></tr><tr><td colspan="2"></td><td>SIZE</td><td>A4</td></tr></table>						MAT'L	SEE TABLE	FINISH	SEE TABLE	DWG. NO.	A04W0610A	PART NO.	_____			SIZE	A4									
UNITS	SCALE	SHEET																																																												
mm	1:1	1 OF 2																																																												
PROJECTION:	DRAW:																																																													
	DAP																																																													
GENERAL TOLERANCE	CHECK:																																																													
.000 ±0.02	HWT																																																													
.00 ±0.10	APPD:																																																													
.0 ±0.20	HHM																																																													
.0 ±2°																																																														
.00 ±1°																																																														
MAT'L	SEE TABLE	FINISH	SEE TABLE																																																											
DWG. NO.	A04W0610A	PART NO.	_____																																																											
		SIZE	A4																																																											
1			2			3			4			5			6																																															

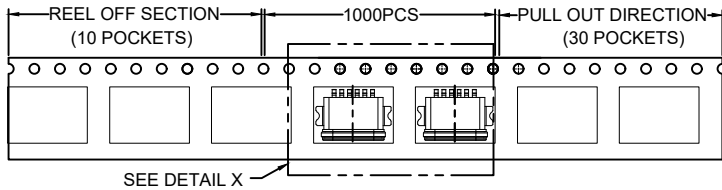

REV	DESCRIPTION	DATE	APPROVED
A	新板发行	2023. 05. 05	HHM

	REEL	CARTON
CONNECTOR (PCS)	1000	10000

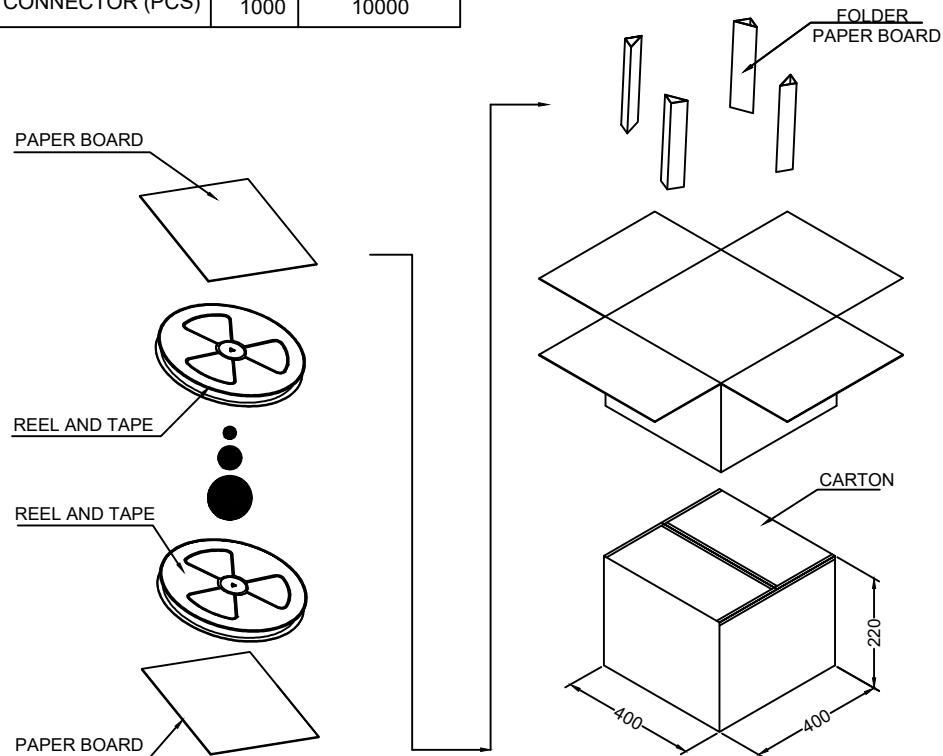

CUSTOMER DRAWING			铭创科技（东莞）有限公司		
UNITS mm	SCALE 1:1	SHEET 2 OF 2	Mingchuang Technology (Dongguan) Co., Ltd		
PROJECTION: 		DRAW: DAP	TITLE 防水TYPE C母座6PIN 沉板0.8 两脚全贴SMT L=6.7 锌合金 IPX7		
GENERAL TOLERANCE .000 ±0.02 .00 ±0.10 .0 ±0.20 .0 ±2° .00 ±1°		CHECK: HWT	MAT'L SEE TABLE		FINISH SEE TABLE
		APPD: HHM	DWG. NO. A04W0610A		PART NO. _____ SIZE A4